

Product Datasheet model uvex x-fit 9199 265

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic, close fitting safety spectacle with extension kit options
- frameless lens design for a wide field of vision
- adjustment for every head and facial shape with the optional uvex Comfort Slider - a multi-stage temple inclination that allows wearers to achieve their own comfortable wearing position
- modular system allows functional accessories to be attached enhancing the ability to get on with the job
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

2. Technical Details Body

Side arms

Material	ABS
Colour	blue translucent


Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

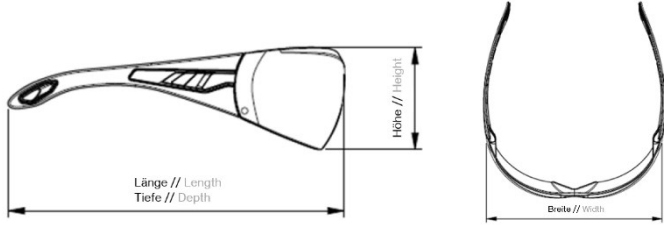
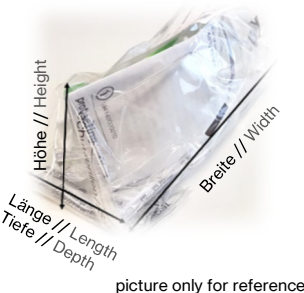
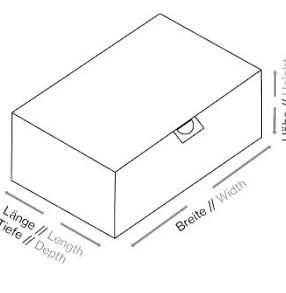

Material	PC
Thickness	1.9 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400

Marking

Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	23g		
Dimensions (L x W x H) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	155 x 142 x 46		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101675633	4031101675633	4031101675633
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	65 x 155 x 58	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	23	230	3,680
Gross weight in approx. g	37	475	8,480
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II